

Function: Form: Fashion







Gamma 515
Freestanding Outdoor Shower
Installation & Care Manual
US/CANADA







### STANDARD SPECIFICATIONS

Recommended on	erational	pressure	1-5 bar
nicocininionaca op	Ciational	probbaro	1 0 501

Maximum hot water temperature 80°C / 176°F

Recommended temperature 50-60°C / 122-140°F

Pressure difference between hot and cold water......max. 1,5 bar


We suggest to install water filters at the beginning of the installation.

### **WARNING:**

- If the above mentioned conditions (see points 1,4,5 and 6) are not observed, the product may not correctly work or not work at all.
- If during installation, before setting the product on the sanitary fittings, faults due to the special finishing are evident you may require the replacement of the tap.

### **IMPORTANT NOTE:**

- Installation to be performed by qualified personnel
- Before connecting to mains, bleed the pipes to avoid damage.

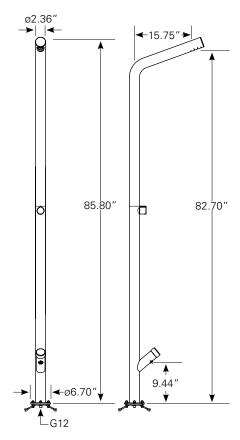












## **INSTALLATION SEQUENCE**

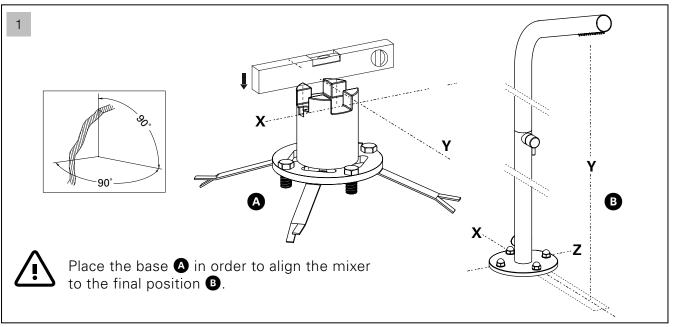


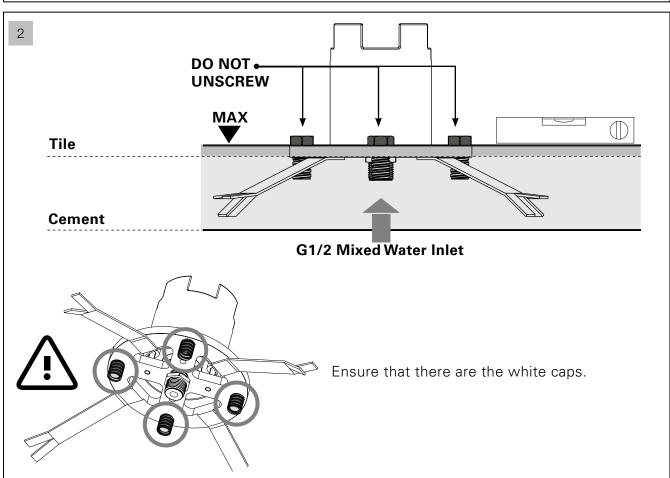




# **INSTALLATION SEQUENCE**

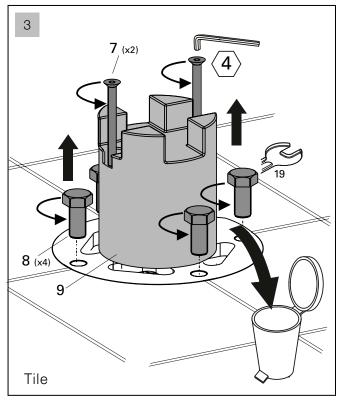

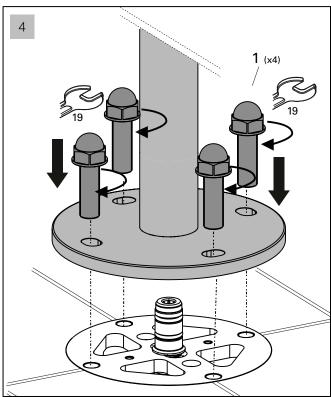

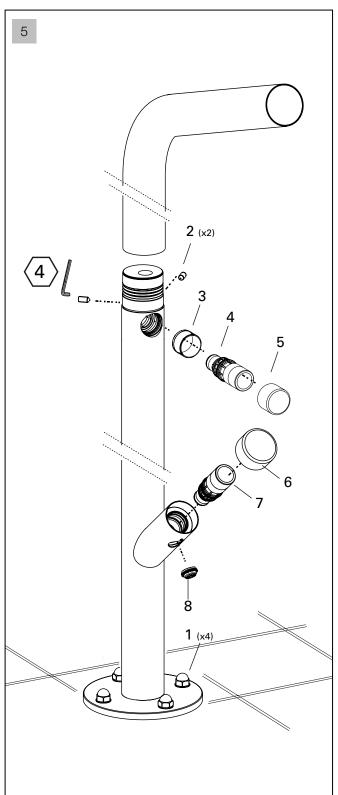





## **CLEANING INSTRUCTIONS**



For correct cleaning of this product use only water and neutral soap, rinse and dry with a soft cloth.


**Don't use** alcohol, solvents, detergents containing corrosive or acid substances (hydrochloric, formic, acetic and phosphoric acid), abrasive sponges and plugs with metallic thread.




### **CAUTION:**

In winter it is recommended to close the system and empty the excess water following the procedure below:

- 1 Close the system
- 2 Open the control handle (see below)
- 3 Unscrew the plugs at the base (see below)
- 4 To reactivate proceed in reverse order (see below)

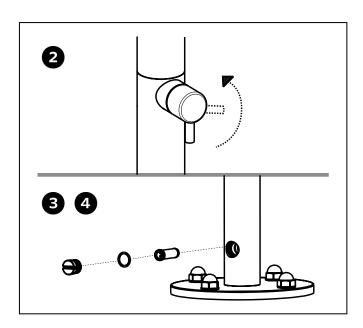







Function: Form: Fashion





( (

Aquatica Plumbing Europe LTD Dzirnavu iela 73-2, Riga, Latvia 13 EN 14516 CL1 CA-DA